




Product Specifications

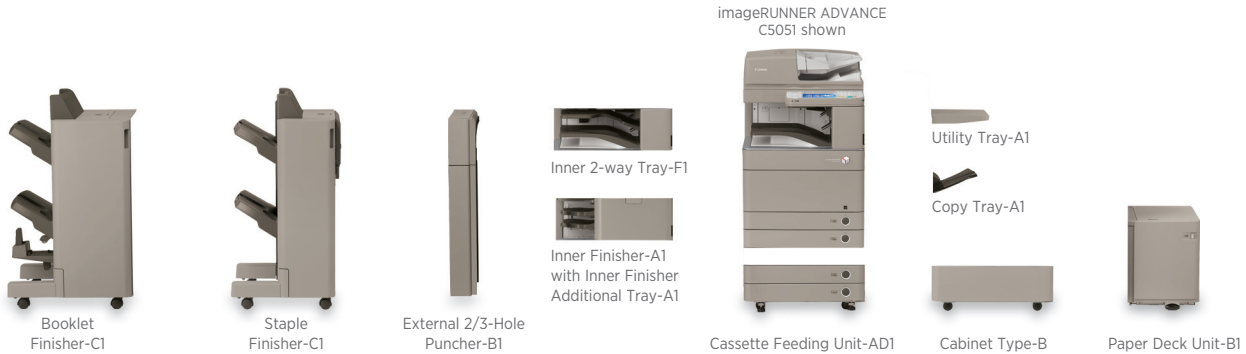

Main Unit

System Type

Color Digital Multifunction Imaging System

Functions

Standard: Copy, Print (UFR II), Scan, Send, Store

Optional: Print (PCL, Adobe® PostScript® 3™), Fax (Up to 4 Lines)

Operation Panel

8.4" SVGA Full-Color, TFT Screen

Memory

Standard: 2GB RAM

Maximum: 2.5GB RAM

Hard Disk Drive

Standard: 80GB

Maximum: 250GB

Mirroring Hard Disk Drive

Optional (80GB, 250GB) Method: RAID1

Network Interface Connection

Standard: 10/100/1000Base-TX

Optional: Wireless LAN (IEEE 802.1x)

Other Interface

Standard: USB 2.0 (Host)x2, USB 2.0 (Device)

Optional: Device Port [USB 2.0 (Host)x2], Serial Interface, Copy Control Interface

Copy/Print Speed (B/W, Color)

Letter: C5051: Up to 51/51 ppm
C5045: Up to 45/45 ppm
C5035: Up to 35/35 ppm
C5030: Up to 30/30 ppm

Legal/11" x 17": C5051/C5045: Up to 26/26 ppm
C5035/C5030: Up to 18/18 ppm

Paper Sources (20 lb. Bond)

Standard: Dual 550-sheet Cassettes
100-sheet Stack Bypass

Optional: Dual 550-sheet Cassettes
2,700-sheet Paper Deck

Maximum: 5,000 Sheets

Output Paper Capacity (20 lb. Bond)

Standard: 250 Sheets (Inner Tray)

Maximum: 3,250 Sheets (w/Staple Finisher or Booklet Finisher)

Output Paper Sizes

Cassettes: 12" x 18", * 11" x 17", * Legal, Letter, Letter-R, Statement-R, Executive, Custom Size [5-1/2" x 7-1/8" to 12" x 18" (139.7mm x 182mm to 304.8mm x 457.2mm)]

Bypass: 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Custom Size [3-7/8" x 5-1/2" to 12-5/8" x 18" (99mm x 139.7mm to 320mm x 457.2mm)]

Paper Deck: Letter

Other Options: Envelope Feeder Attachment** (COM10 No.10, Monarch, DL, ISO-B5, ISO-C5) Tab Feeding Attachment Kit**

Acceptable Paper Weights

Cassettes: 14 lb. Bond to 110 lb. Index (52 to 209g/m²)

Bypass: 14 lb. Bond to 140 lb. Index (52 to 256g/m²)

Duplexing

Paper Size: Standard Automatic Trayless Duplexing (Executive to 12" x 18")

Paper Weights: 14 lb. Bond to 110 lb. Index (52 to 209g/m²)

Special Media Support

Tracing, Labels, Transparency, Tab, and Envelopes

Warm-up Time

38 Seconds from Power On

C5051/C5045: 18 Seconds from Sleep Mode

C5035/C5030: 15 Seconds from Sleep Mode

Power Requirements/Plug

C5051/C5045: 120V AC, 60Hz, 20A/NEMA 5-20P

C5035/C5030: 120V AC, 60Hz, 15A/NEMA 5-15P

Power Consumption

C5051/C5045: Maximum: 1,800W; Sleep Mode: 1W

C5035/C5030: Maximum: 1,300W; Sleep Mode: 1W

Dimensions (H x W x D)

C5051/C5045: 38-5/8" x 24-3/8" x 29-7/8" (982mm x 620mm x 760mm)

C5035/C5030: 37" x 24-3/8" x 29" (938mm x 620mm x 735mm)

Installation Space (W x D)

C5051/C5045: 42-1/8" x 52" (1071mm x 1319mm)

C5035/C5030: 42-1/8" x 49-5/8" (1071mm x 1259mm)

Weight

C5051/C5045: Approx. 379 lb. (172kg)***

C5035/C5030: Approx. 342 lb. (155kg)***

Toner (Estimated Toner Yield @ 5% Coverage)

C5051/C5045: Black: 44,000 Images

Color (C,M,Y): 38,000 Images

C5035/C5030: Black: 36,000 Images

Color (C,M,Y): 27,000 Images



Main Unit (continued)

Image Reader Unit

Scan Resolution

Up to 600 x 600 dpi

Acceptable Originals

Sheet, Book, 3-Dimensional objects
[up to 4.4 lb. (2kg)]

Maximum Original Size

Up to 11" x 17"

Document Feeder

Scan Method

C5051/C5045

Single-Pass Duplexing Automatic Document Feeder

C5035/C5030

Duplex Automatic Document Feeder

Acceptable Originals

Paper Sizes: 11" x 17", Legal, Letter, Letter-R,
Statement, or Statement-R

Paper Weights: One-sided Scanning: 11 lb. Bond to
32 lb. Bond (42 to 128g/m²)
Two-sided Scanning: 13 lb. Bond to
32 lb. Bond (50 to 128g/m²)

Scan Speed (BW/Color; Letter)

C5051/C5045

Simplex: 70/70 ipm (300 dpi)
70/51 ipm (600 dpi)

Duplex: 100/100 ipm (300 dpi)
70/51 ipm (600 dpi)

C5035/C5030

Simplex: 46/46 ipm (300 dpi)
46/46 ipm (600 dpi)

Duplex: 17.5/17.5 ipm (300 dpi)
17.5/17.5 ipm (600 dpi)

Paper Capacity (20 lb. Bond)

C5051/C5045 150 Sheets

C5035/C5030 100 Sheets

Copy Specifications

First-Copy-Out Time (Letter)

C5051/C5045

B/W: 4.0 Seconds

Color: 6.5 Seconds

C5035/C5030

B/W: 5.5 Seconds

Color: 8.9 Seconds

Multiple Copies

1 to 999

Color Mode

Auto Color, Full Color, Black, Single Color, Two Colors

Copy Exposure

Automatic or Manual (9 Levels)

Magnification

25% - 400% (1% Increments)

Preset Reductions

25%, 50%, 64%, 73%, 78%

Preset Enlargements

121%, 129%, 200%, 400%

Basic Copy Features

Preset R/E Ratios by Area, Finishing, Two-Sided, Exposure Adjustment, Original Type Selection, Interrupt Mode, Sample Set, Setting Confirmation/Cancel, Standard Keys, Reset, Guide Display, Job Duration Display, Reserved Copying

Special Copy Features

Two-page Separation, Cover/Sheet Insertion, Booklet, Transparency Interleaving, Shift, Margin, Frame Erase, Image Combination, Different-size Original, Job Build, Job Done Notice, Scan Image Check, Mode Memory, Recall, Negative/Positive Inversion, Image Repeat, Mirror Image, Sharpness, Tab Paper Creation, Form Composition, Secure Watermark, Page Numbering, Copy Set Numbering, Watermark and Date, Job Block Combination, Store in User Inbox

Print Specifications

Processor

Canon Dual Custom Processor (Shared)

Memory

Standard: 2GB RAM

Maximum: 2.5GB RAM

Hard Disk Drive

Standard: 80GB

Maximum: 250GB

Maximum Engine Resolution

1200 x 1200 dpi

PDL Support

Standard: UFR II

Optional: PCL 5c, PCL 6, Adobe PS 3

Print Driver Supported OS

UFR II: Windows® (Windows 2000/
XP/Server 2003/Server 2008/
Windows Vista®, Windows 7), Citrix
MetaFrame, Macintosh® (OS X 10.2.8
or Later)

PCL 5c/6: Windows (Windows 2000/
XP/Server 2003/Server 2008/
Windows Vista, Windows 7), Citrix
MetaFrame

Adobe PS 3: Windows (Windows 2000/
XP/Server 2003/Server 2008/
Windows Vista, Windows 7), Citrix
MetaFrame, Macintosh (OS X 10.2.8
or Later)

XPS: Windows Vista, Windows Server
2008, Windows 7

Direct Print Support

Standard: TIFF, JPEG, EPS[†]

Optional: PDF, XPS[†]

Print Features

Suspend Job Timeout, Feature, Subset Finishing (PS only), Profile Settings, Secured Print, Watermark, Page Border, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Offsetting, Printing on Transparencies, Front/Back Covers, Black-and-White Printing, Objective, Color/Black-and-White Auto Detect, Toner Reduction, Poster Printing, PANTONE® named Color Profiles[†]

Scan Specifications

Network TWAIN Scan

Standard

Network Scan Utility

Color Network ScanGear

Universal Send Specifications

Sending Method

E-Mail, I-Fax, File Server (FTP, SMB, WebDAV), User Inbox, Super G3 Fax (Optional)

Color Mode

Auto Color Select (Full Color, Grayscale), Auto Color Select (Full Color, B/W), Full Color, Grayscale, B/W

Scan Resolution

600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi,
200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi,
150 x 150 dpi, 100 x 100 dpi

Address Book Capacity

Max. 1,800 Destinations (Incl. 200 One-Touch Buttons)

Communication Protocol

File: FTP (TCP/IP), SMB (TCP/IP),
NCP (IPX), WebDAV

E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full)

File Format

Standard: TIFF, JPEG, PDF, PDF (Compact), PDF
(Apply Policy), PDF (Optimize for
Web), PDF/A-1b, XPS, XPS (Compact)

Optional: PDF (Trace & Smooth), PDF/XPS
(OCR), PDF (Encrypted), PDF/XPS
(Digital Signature), PDF (Reader
Extensions), Office Open XML (OCR)

I-Fax Data Format

B/W: TIFF (MH, MR, MMR)

Color: TIFF (Profile-C)

Fax Specifications

Maximum Number of Connection Lines

4

Modem Speed

Super G3: 33.6 Kbps

G3: 14.4 Kbps

Compression Method

MH, MR, MMR, JBIG

Resolution

400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi,
200 x 100 dpi

Sending/Recording Size

Statement to 11" x 17"

Fax Features

Job Forwarding, Different-size Originals, Adjusting Overall Density for Scanning, Sharpness, Copy Ratio, Erase Frame, Job Build, Specifying the Sender's Name (when sending fax), Selecting the Telephone Line (when sending fax), Delayed Send, Preview, Finished Stamp, Job Done Notice, Original Type, Two-Sided Original, Book to Two pages



C5051 / C5045 C5035 / C5030

Main Unit (continued)

Store Specifications

Mail Box	
No. Supported:	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes
Max. Pages Stored:	6,000
Advanced Box	
Available Disk Space:	Approx. 10GB (Standard HDD) 113GB (250GB HDD)
Communication Protocol:	SMB or WebDAV
Supported Client PC:	Windows (Windows 2000/XP/Windows Vista)
Max. Number of Concurrent Connection:	SMB: 32, WebDAV: 12 (Active Sessions)
Advanced Box Features:	Disabling Advanced Box, Storage Filtering, Authentication for Advanced Box Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

Memory Media

Standard:	USB Memory
Optional:	SD, SDHC, CompactFlash, Memory Stick, Microdrive

Security Specifications

Standard

Department ID Management, Single Sign On-H, Access Management System (Device and Function Level Log-in), Secured Print, Trusted Platform Module, User Access Control of Advanced Box, Mail Box Password Protection, IPV6, Restricting Features (Restricting the Send Function, Restricting New Addresses on Address Book), SSL Encrypted Communication, SNMPv1/v3, MAC/IP Address Filtering, SMTP Authentication, POP Authentication before SMTP, HDD Format, Adobe® LiveCycle® Rights Management ES2 Integration

Optional

Removable HDD, HDD Erase, HDD Encryption/Mirroring, Encrypted Secure Print, Encrypted PDF, Document Scan Lock, IPSec, Secure Watermark

Environmental Information

ENERGY STAR® Qualified, RoHS Compliant, Ecomark, Blue Angel, WEEE Directive

Optional Accessories

Paper Supply Options

Cassette Feeding Unit-AD1	
Paper Capacity:	550 Sheets x 2 Cassettes (20 lb. Bond)
Acceptable Paper Weight:	14 lb. Bond to 110 lb. Index (52 to 209g/m ²)
Acceptable Paper Size:	12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, and Custom Size [5-1/2" x 7-3/16" to 12" x 18" (139.7mm x 182mm to 304.8mm x 457.2mm)]
Power Source:	From Main Unit/Approx. 30W
Maximum Power Consumption:	Approx. 30W
Dimensions (H x W x D):	9-7/8" x 24-3/8" x 27-5/8" (251mm x 620mm x 700mm)
Weight:	Approx. 60.6 lb. (27.5kg)
Paper Deck Unit-B1**	
Paper Capacity:	2,700 Sheets (20 lb. Bond)
Acceptable Paper Weight:	14 lb. Bond to 28 lb. Bond (52 to 105g/m ²)
Acceptable Paper Size:	Letter
Power Source/Maximum Power Consumption:	From Main Unit/Approx. 45W
Dimensions (H x W x D):	18-5/8" x 14-5/8" x 23-3/4" (473mm x 372mm x 603mm)
Weight:	Approx. 81.6 lb. (37kg)
Envelope Feeder Attachment-D1**	
Paper Capacity:	50 Sheets (or 30mm in height)
Acceptable Envelope Sizes:	COM10 No.10, Monarch, DL, ISO-B5, ISO-C5
Feeding Speed:	10 cpm
Dimensions (H x W x D):	3-1/4" x 17-1/4" x 12-1/8" (81mm x 439mm x 307mm)
Weight:	Approx. 2.6 lb. (1.2kg)
Copy Tray-J1***	
Total Output Capacity:	100 Sheets (20 lb. Bond)
Acceptable Paper Weight:	14 lb. Bond to 110 lb. Index (52 to 209g/m ²)
Acceptable Paper Size:	11" x 17", Legal, Letter, Letter-R, Statement-R and Executive
Dimensions (H x W x D):	5-5/8" x 14-3/8" x 14-3/4" (144mm x 365mm x 373mm) (When Auxiliary Tray is extended)
Weight:	Approx. 1 lb. (438g)

Output Options

Inner 2-Way Tray-F1*	
Number of Trays:	2
Total Output Capacity:	Top Tray: 250 Sheets (20 lb. Bond) Lower Tray: 100 Sheets (20 lb. Bond)
Acceptable Paper Weight:	14 lb. Bond to 140 lb. Index (52 to 256g/m ²)
Acceptable Paper Size:	12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Custom Size [3-7/8" x 5-1/2" to 12-5/8" x 18" (99mm x 139.7mm to 320mm x 457.2mm)] and Envelopes
Dimensions (H x W x D):	3" x 16-3/4" x 16" (76mm x 426mm x 407mm)
Weight:	Approx. 1.3 lb. (574g)
Inner Finisher-A1	
Number of Trays:	Up to 2 Trays (with Inner Finisher Additional Tray-A1)
Total Output Capacity:	Without Inner Finisher Additional Tray-A1: 500 Sheets With Inner Finisher Additional Tray-A1: Top Tray: 100 Sheets (Letter) Lower Tray: 200 Sheets (Letter)
Acceptable Paper Weight:	14 lb. Bond to 140 lb. Index (52 to 256g/m ²)
Acceptable Paper Size:	12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Custom Size [3-7/8" x 5-9/16" to 12-5/8" x 18" (99.7mm to 320mm x 457.2mm)] and Envelopes
Staple Positions:	Corner Stapling: 11" x 17", Legal, Letter, Letter-R Double Stapling: 11" x 17", Legal, Letter, Letter-R
Max. Stapling Capacity:	Letter: 50 Sheets (14 lb. Bond - 21 lb. Bond) 30 Sheets (22 lb. Bond - 28 lb. Bond) 2 Sheets (29 lb. Bond - 140 lb. Index) 11" x 17", Legal, Letter-R: 30 Sheets (14 lb. Bond - 21 lb. Bond) 20 Sheets (22 lb. Bond - 28 lb. Bond) 2 Sheets (29 lb. Bond - 140 lb. Index)
Paper Capacity of Staple Mode:	Top Tray: 3/8" in Height Lower Tray: 30 Sets (or 2-1/2" in Height)
Type of Staple:	Staple-J1 (5,000 x 3)
Power Source/Max. Power Consumption:	From Main Unit/Approx. 50W
Dimensions (H x W x D):	9-1/4" x 34-1/8" x 21-1/4" (234mm x 865mm x 540mm) (When Auxiliary Tray is extended)
Weight:	Approx. 28.7 lb. (13kg) (When Inner Finisher Additional Tray-A1 is attached)



Optional Accessories (continued)

Staple Finisher-C1

Number of Trays:	2
Total Output Capacity:	3,000 Sheets (Letter, Statement-R, Executive) Top Tray: 1,300 Sheets (Letter, Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R) Lower Tray: 1,700 Sheets (Letter, Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R)
Acceptable Paper Weight:	14 lb. Bond to 140 lb. Index (52 to 256g/m ²)
Acceptable Paper Size:	12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, and Envelopes
Staple Positions:	Corner Stapling: 11" x 17", Legal, Letter, Letter-R, Executive Double Stapling: 11" x 17", Legal, Letter, Letter-R, Executive
Max. Stapling Capacity:	Letter, Executive: 50 Sheets (14 lb. Bond to 21 lb. Bond) 30 Sheets (22 lb. Bond to 28 lb. Bond) 2 Sheets (29 lb. Bond to 140 lb. Index) 11" x 17", Legal, Letter-R: 30 Sheets (14 lb. Bond to 21 lb. Bond) 20 Sheets (22 lb. Bond to 28 lb. Bond) 2 Sheets (29 lb. Bond to 140 lb. Index)
Paper Capacity of Staple Mode:	Top Tray: 1,300 Sheets/30 Sets (Letter, Executive) 650 Sheets/30 Sets (11" x 17", Legal, Letter-R) Lower Tray: 1,700 Sheets/30 Sets (Letter, Executive) 650 Sheets/30 Sets (11" x 17", Legal, Letter-R)
Type of Staple:	Staple-J1 (5,000 x 3)
Power Source/Max. Power Consumption:	From Main Unit/Approx. 117W (When External 2/3-Hole Puncher-B1 is attached)
Dimensions (H x W x D):	43-1/4" x 26-5/8" x 25-1/2" (1097mm x 677mm x 646mm) (When Auxiliary Tray is extended)
Weight:	Approx. 101 lb. (46kg)

Booklet Finisher-C1

Number of Trays:	2
Total Output Capacity:	3,000 Sheets (Letter, Statement-R, Executive) Top Tray: 1,300 Sheets (Letter, Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R) Lower Tray: 1,700 Sheets (Letter, Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R)
Acceptable Paper Weight:	14 lb. Bond to 140 lb. Index (52 to 256g/m ²)
Acceptable Paper Size:	12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, and Envelopes
Staple Positions:	Corner Stapling: 11" x 17", Legal, Letter, Letter-R, Executive Double Stapling: 11" x 17", Legal, Letter, Letter-R, Executive Saddle-Stitch: 12" x 18", 11" x 17", Legal, Letter-R
Max. Stapling Capacity:	Letter, Executive: 50 Sheets (14 lb. Bond to 21 lb. Bond) 30 Sheets (22 lb. Bond to 28 lb. Bond) 2 Sheets (29 lb. Bond to 140 lb. Index) 11" x 17", Legal, Letter: 30 Sheets (14 lb. Bond to 21 lb. Bond) 20 Sheets (22 lb. Bond to 28 lb. Bond) 2 Sheets (29 lb. Bond to 140 lb. Index)
Paper Capacity of Staple Mode:	Top Tray: 1,300 Sheets/30 Sets (Letter, Executive) 650 Sheets/30 Sets (11" x 17", Legal, Letter-R) Lower Tray: 1,700 Sheets/30 Sets (Letter, Executive) 650 Sheets/30 Sets (11" x 17", Legal, Letter-R)
Max. Saddle-Stitch Capacity:	16 Sheets (14 lb. Bond to 20 lb. Bond) (12" x 18", 11" x 17", Legal, Letter-R) 10 Sheets (22 lb. Bond to 28 lb. Bond) (12" x 18", 11" x 17", Legal, Letter-R)
Paper Capacity of Saddle-Stitch Mode:	25 Booklets (5-sheet Booklets)
Type of Staple:	Staple Cartridge-D2 (2,000 x 3)
Power Source/Maximum Power Consumption:	From Main Unit/Approx. 117W (When External 2/3-Hole Puncher-B1 is attached)
Dimensions (H x W x D):	43-1/4" x 31-1/8" x 25-1/2" (1097mm x 789mm x 646mm) (When Auxiliary Tray is extended)
Weight:	Approx. 165 lb. (75kg)

External 2/3-Hole Puncher-B1***

Acceptable Punch Paper Weight:	14 lb. Bond to 140 lb. Index (52 to 256g/m ²)
Acceptable Punch Paper Size:	11" x 17", Legal, Letter, Letter-R
Punch Type:	2 Holes (Legal, Letter-R) 3 Holes (Letter, 11" x 17")
Distance between Punch Holes:	2 Holes: 2-3/4" (70mm) 3 Holes: 4-1/4" (108mm)
Punch Waste Tray Capacity:	Approx. 2,500 Sheets (20 lb. Bond)
Power Source:	From Main Unit
Dimensions (H x W x D):	35-3/4" x 4-1/4" x 24-1/2" (908mm x 107mm x 623mm)
Weight:	Approx. 15.9 lb. (7.2kg)

Print Controller Options

imagePASS-B1**

Type	Embedded
Connectable Devices:	imageRUNNER ADVANCE C5051/C5045/C5035/C5030
Processor:	Intel® Celeron® M440 1.88GHz
System:	System 8e Release2
Memory:	Standard: 512MB Maximum: 1GB
Hard Disk:	80GB
DVD-ROM:	N/A
Interface Connections:	10/100/1000Base-T (RJ-45)
PDL Support:	Adobe PS 3/PCL 5c/PCL 6
Print Resolution:	1200 x 1200 dpi 2400 dpi Equivalent x 600 dpi
Print Driver Supported OS:	Adobe PS 3: Windows (Windows 2000/XP/Server 2003/Server 2008/Windows Vista), Macintosh (OS X 10.3.9 or Later) PCL 5c/6: Windows (Windows 2000/XP/Server 2003/Windows Vista)
Utility Software:	Remote Scan 5.3, Command WorkStation® for Windows, Command WorkStation for Mac, Web Tools
Standard Features:	Auto Trapping, Paper Catalog
EFI Options:	Hot Folder v2.0, Secure Erase V1.1, Impose v2.7, 512MB Optional Memory, X-Rite Eye-One



C5051 / C5045 C5035 / C5030

Optional Accessories (continued)

ColorPASS-GX300[■]	
Type:	External
Connectable Devices:	imageRUNNER ADVANCE C5051
Processor:	Intel® Core™2 Duo, Xeon E8400 2 x 3.0GHz FSB 1333MHz
System:	System 8 Release2
Memory:	Standard: 2GB Maximum: 2GB
Hard Disk:	160GB
DVD-ROM:	Standard (DVD-RW)
Interface Connections:	10/100/1000Base-T (RJ-45)
PDL Support:	Adobe PS 3
Print Driver Supported OS:	Windows (Windows 2000/XP/ Server 2003/Server 2008/Windows Vista), Macintosh (OS X 10.3.9 or Later)
Print Resolution:	1200 x 1200 dpi, 2400 dpi Equivalent x 600 dpi
Utility Software:	Remote Scan 5.3, Command WorkStation® for Windows, Command WorkStation for Mac, WebTools
Standard Features:	Auto Trapping, Paper Catalog, Hot Folders, Virtual Printers, Secure Erase
EFI Options:	Integrated Interface and Stand, X-Rite Eye-One, Impose v2.7, Removable Hard Disk Drive Kit, Graphic Arts Feature Set Premium v2.2, Compose v2.0
Dimensions (H x W x D):	19-1/8" x 8-1/2" x 19-1/8"
Weight:	Approx. 43.5 lb.

Other Optional Accessories

Cabinet Type-B[■]
 Inner Finisher Additional Tray-A1
 Tab Feeding Attachment Kit-B1^{**}
 Utility Tray-A1
 USB Keyboard
 Key Switch Unit-A2
 Card Reader-C1[■]
 Copy Card Reader Attachment Kit-B1
 Braille Label Kit
 ADF Access Handle-A1
 Stamp Ink CRG-C1
 Stamp Unit-B1
 imageRUNNER ADVANCE Essentials
 Universal Send Advanced Feature Set-D1
 Universal Send Security Feature Set-D1
 Universal Send Digital User Signature Kit-C1
 Super G3 Fax Board-AE1
 Super G3 2nd Line Fax Board-AE1[•]
 Super G3 3rd/4th Line Fax Board-AE1^{••}
 Remote Fax Kit-A1^{•••}
 PS Printer Kit-AE1[■]
 PCL Printer Kit-AE1
 Direct Print Kit (for PDF/XPS)-H1[■]
 Encrypted Secure Print-D1
 Barcode Printing Kit-D1[•]
 Web Access Software-H1^{••}
 Secure Watermark-B1
 Wireless LAN Board-B1^{•••}
 USB Device Port-B1
 Multimedia Reader/Writer-A1[•]
 Additional Memory Type B (512MB)
 Document Scan Lock Kit-A1
 Data Erase Kit-C1
 HDD Data Encryption and Mirroring Kit-C1
 Removable HDD Kit-AC1
 2.5-inch/80GB HDD-C1^{••}
 2.5-inch/250GB HDD-D1
 IPsec Board-B2^{•••}
 Expansion Bus-F1
 Voice Guidance Kit-F1^{•••}
 Voice Operation Kit-C1^{•••}
 Remote Operator's Software Kit-B1
 Serial Interface Kit-K1
 Copy Control Interface Kit-A1[•]
 eCopy Suite
 imageWARE Suite

- * Not available in top cassette.
- ** Installs on Cassette 2. Cannot install Envelope Feeder Attachment and Tab Feeding Attachment Kit at same time.
- *** Includes consumables.
- ▲ Requires the Canon PS Printer Kit-AE1.
- † EPS and XPS cannot be printed directly from Memory Media or Advanced Box.
- †† Cannot be installed with Cabinet Type-B.
- ††† Cannot be installed with Booklet Finisher-C1 or Staple Finisher-C1.
- ▲ Cannot be installed with Booklet Finisher-C1, Staple Finisher-C1, or Inner Finisher-A1.
- ▲▲ Statement cannot be used when the External 2/3-Hole Puncher-B1 is attached.
- ▲▲▲ External 2/3-Hole Puncher-B1 can only be installed with either the Staple Finisher-C1 or Booklet Finisher-C1.
 - Requires Additional Memory Type B (512MB).
 - Cannot be installed when Cassette Feeding Unit-AD1 is installed.
- Requires Copy Card Reader Attachment Kit-B1.
 - Requires Super G3 Fax Board-AE1.
 - Requires Super G3 Fax Board-AE1 and Super G3 2nd Line Fax Board-AE1.
 - Cannot be installed with Super G3 Fax Board-AE1.
 - ◆ Requires PCL Printer Kit-AE1.
 - ◆◆ Requires PS Printer Kit-AE1 or Direct Printer Kit (for PDF/XPS)-H1 for printing PDF files.
 - ◆◆◆ Requires Expansion Bus-F1.
 - ◇ Requires Device Port-B1.
 - ◇◇ 80GB HDD for Mirroring functionality only, cannot be used to increase storage.
 - ◇◇◇ Voice Operation Kit-C1 and Voice Guidance Kit-F1 cannot be installed together.
 - ◇◇◇◇ Cannot be installed with Serial Interface Kit-K1 or Card Reader-C1

NOTE: Some accessories require additional equipment or may be prerequisites for other options. Some accessories cannot be installed simultaneously. Check with your Authorized Canon Dealer for details.

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. PANTONE and other Pantone, LLC trademarks are the property of Pantone, LLC. CANON, IMAGERUNNER, MEAP, and the GENUINE logo are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEANYWARE is a trademark of Canon. All other referenced product names and marks are trademarks of their respective owners and hereby acknowledged. Some items may not be available at this time; please check for availability. Specifications and availability subject to change without notice. ©2010 Canon U.S.A., Inc. All rights reserved.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc. and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims of unauthorized copying.



Canon
image*ANYWARE*

1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042

